

# Photoelectric Smoke Alarm with 9V Battery Backup

Cat No:  
**3786PH14**




Ideal for residential use, Photoelectric Smoke Alarms are more sensitive at detecting slow smouldering fires before they burst into flames.

*This Smoke Alarm features:*

- Low Battery Warning
- Hush Function
- Interconnectable (up to 40 detectors)

And includes a 9V Battery Backup. It's simple to change the battery every year with the Easy Install click-on Body & Base.

*If you want to never replace a battery again, then opt for the 3786PH14LI model which includes a 10 Year Lithium Battery. Ideal for hard to reach installations.*

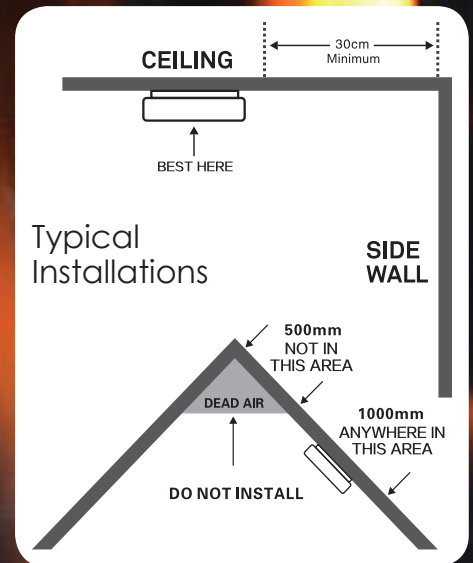

## SPECIFICATIONS 3786PH14

Mains Powered: 230-240 V/AC 50 Hz	Temperature: Operating Range +5° to +45° C
Alarm Volume: Greater than 85dB	Interconnection: Up to 40 detectors
Sensitivity: 0.10~0.16dB/m	Standards: AS3786:2014 & ActivFire certified
Coverage: 20 to 40m <sup>2</sup> capacity	Warranty: Product Replacement Warranty only – 5 years limited (excludes battery)
Hush Time: Approx 8 minutes	Includes: 9V battery backup
Operation: Current <100mA	
Humidity: Relative 10% to 90%	

**SmokeWatch** – where safety is the priority

# Photoelectric Smoke Alarm with 10 Year Lithium Battery

Cat No:  
**3786PH14LI**

Ideal for residential use, Photoelectric Smoke Alarms are more sensitive at detecting slow smouldering fires before they burst into flames.

*This Smoke Alarm features:*


- 10 Year Lithium Battery
- Low Battery Warning
- Hush Function
- Interconnectable (up to 40 detectors)

Particularly suited to hard to reach installations as there's no need to change the battery every year.

Opt for the 3786PH14 model if you prefer the standard 9V Battery Backup version.



**No need to replace the battery every year! with a 10 Year Lithium Battery**

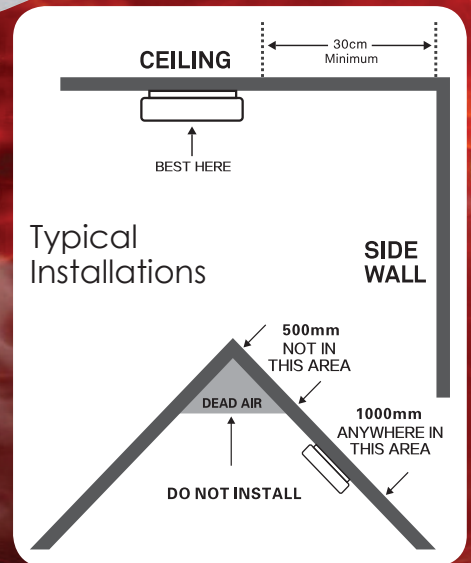

## SPECIFICATIONS 3786PH14LI

Mains Powered: 230-240 V/AC 50 Hz	Temperature: Operating Range +5° to +45° C
Alarm Volume: Greater than 85dB	Interconnection: Up to 40 detectors
Sensitivity: 0.10~0.16dB/m	Standards: AS3786:2014 & ActivFire certified
Coverage: 20 to 40m <sup>2</sup> capacity	Warranty: Product Replacement Warranty only – 5 years limited (excludes battery)
Hush Time: Approx 8 minutes	Inside Unit: Lithium Battery with Pull Tab to activate Non-rechargeable, non-replaceable
Operation: Current <100mA	
Humidity: Relative 10% to 90%	

**SmokeWatch** – where safety is the priority